

Declassified in Part - Sanitized Copy Approved for Release 2013/12/04 :
CIA-RDP78-03535A002000010007-0


STAT


PROJECT 2529

MEMORY AND BAY GATES;

BAY-SELECTOR SWITCH


Declassified in Part - Sanitized Copy Approved for Release 2013/12/04 :
CIA-RDP78-03535A002000010007-0

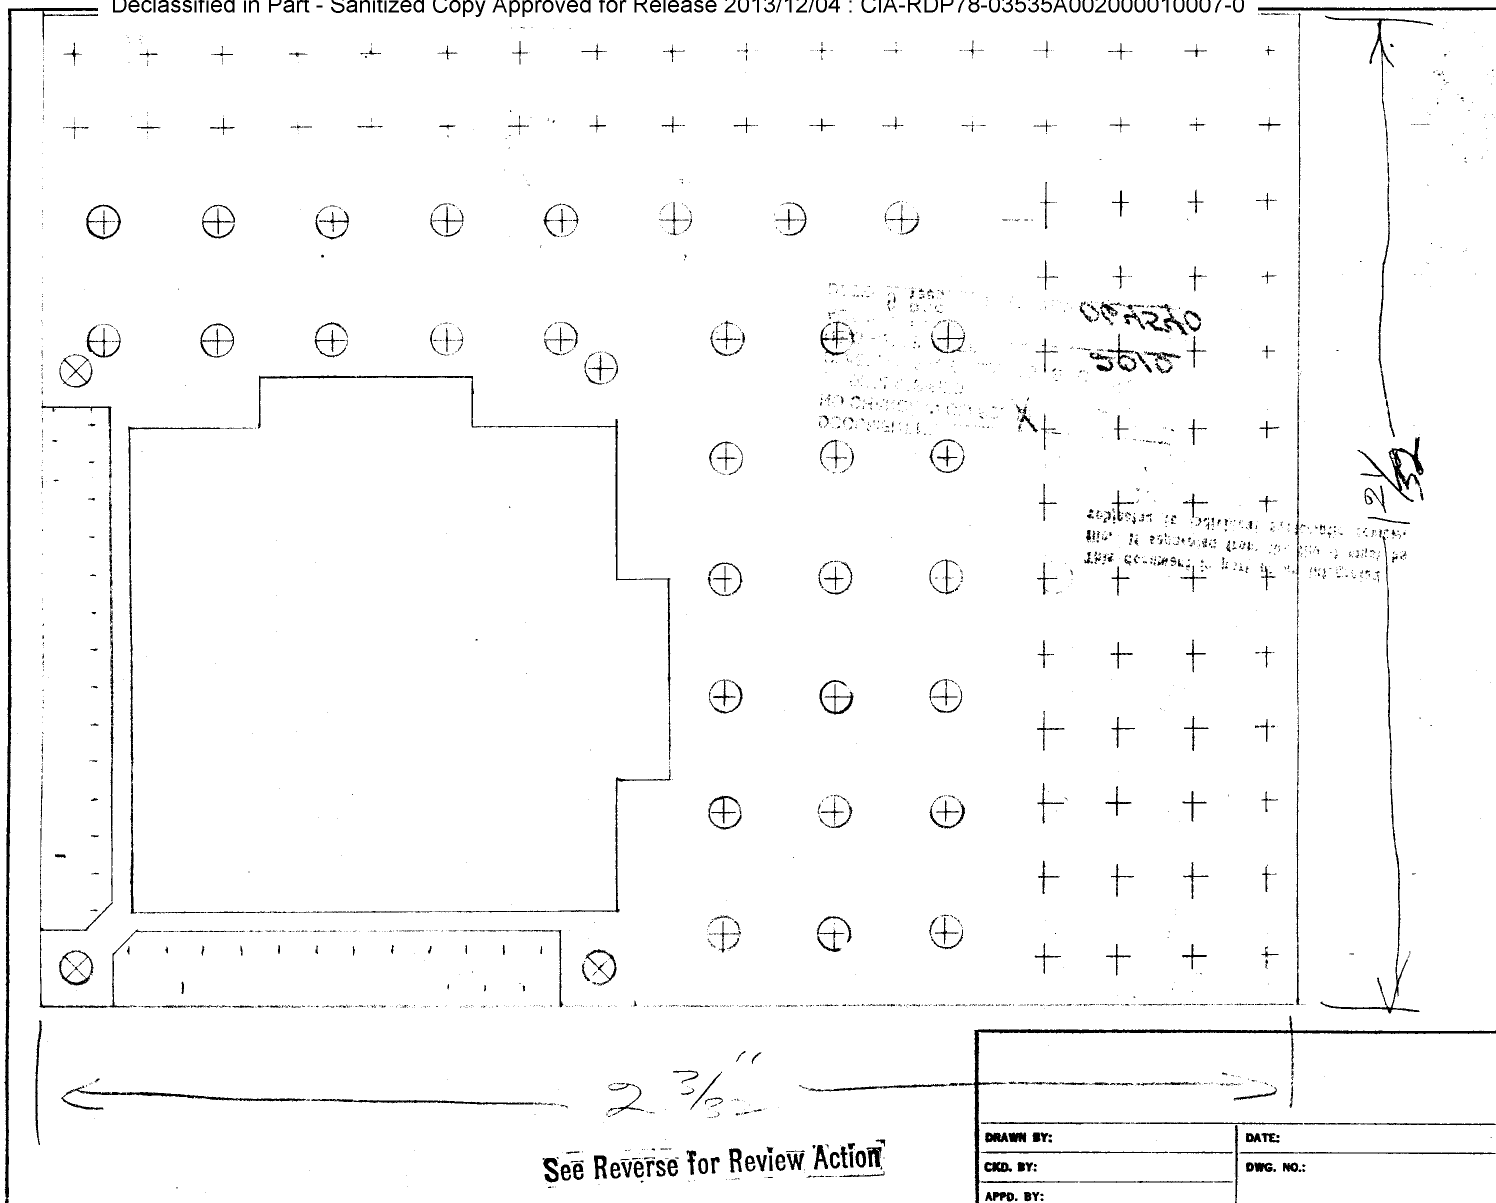

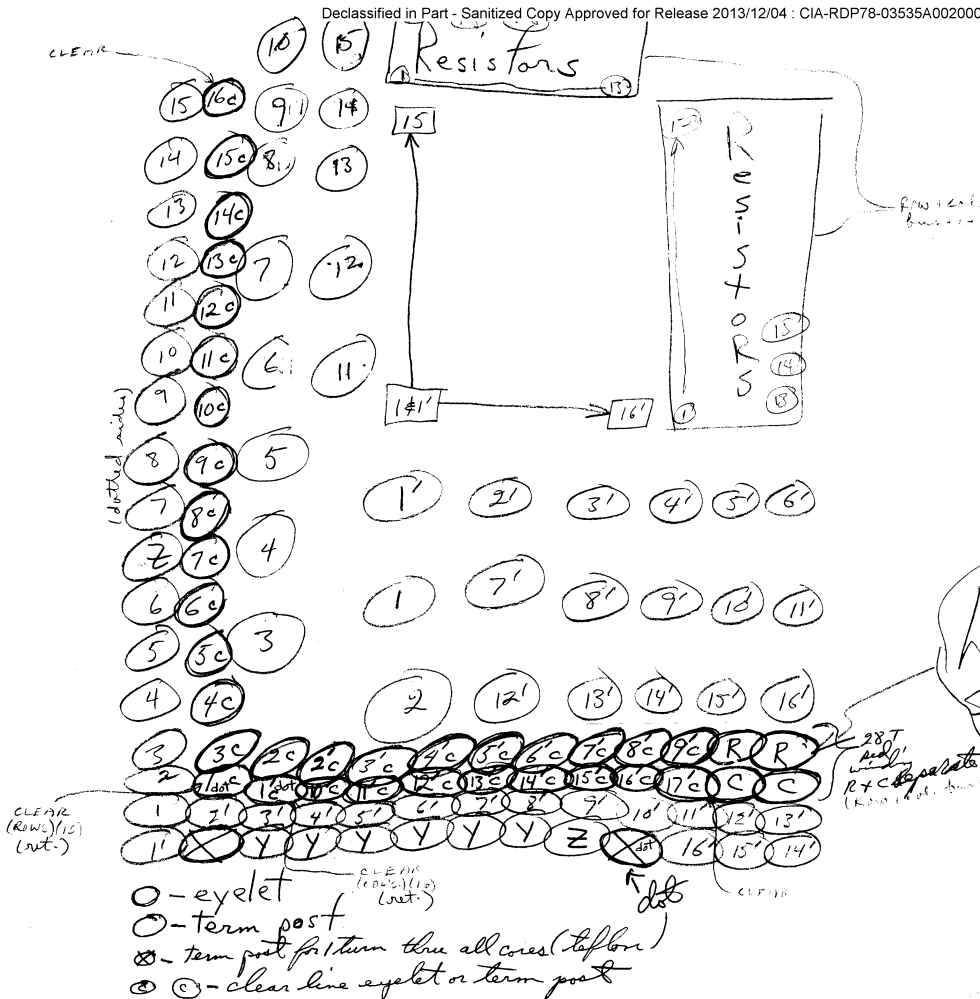

- Notes
- ② - ~~1.052~~ "for passing 60T to next board"
 - ① - .020" holes for 120R resistors
there are 8 Resistors altogether
16 stage SP { 3 R's with 5 wires each
1 R with 1 wire
15 stage SP { 2 R's with 5 wires each
1 R with 4 wires
1 R with 1 wire

has been
switched around
in 3rd BA
12/12/57

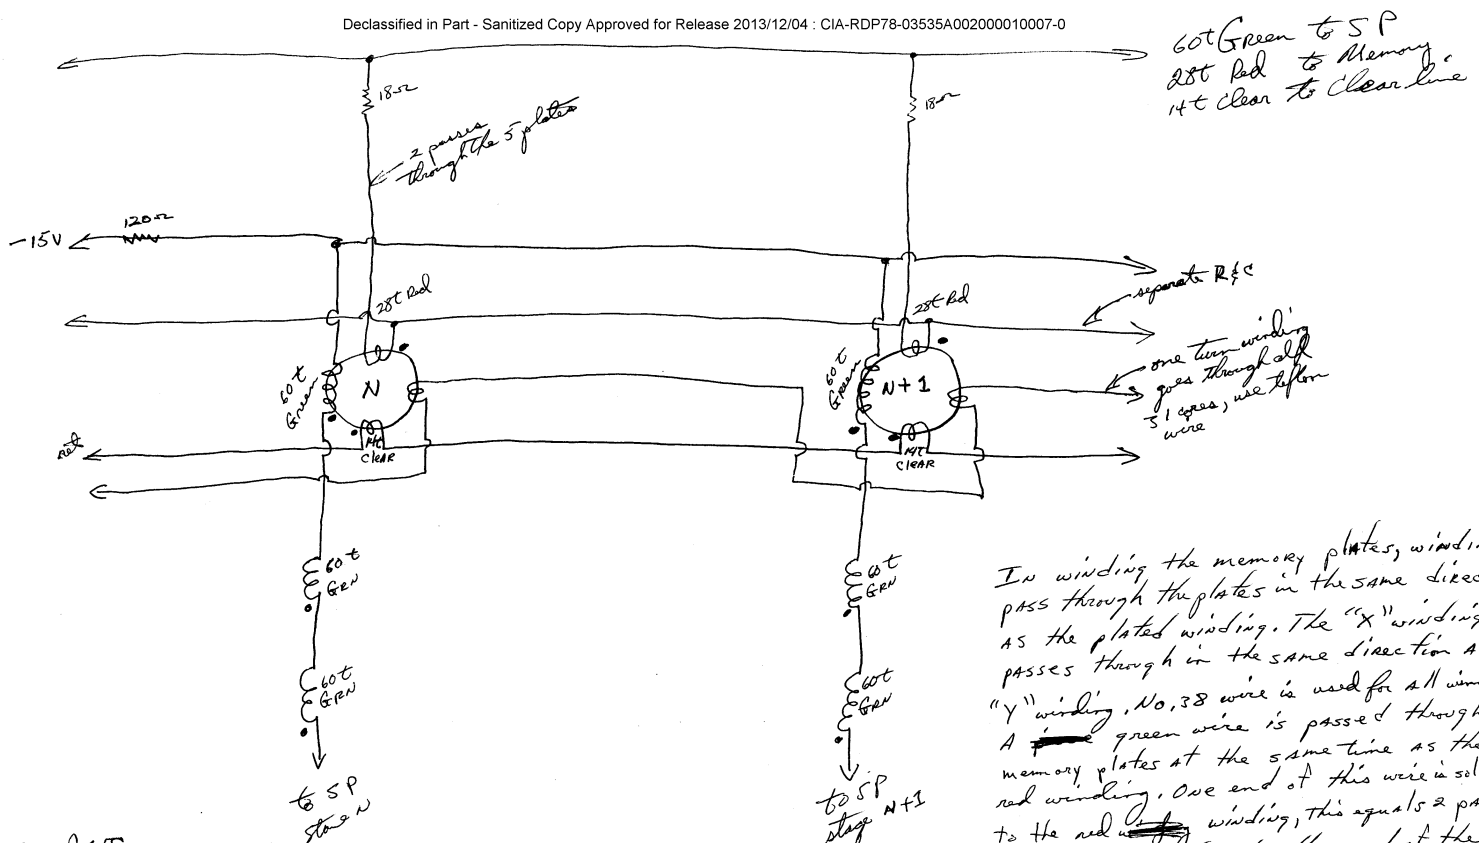

In winding the memory plates, windings pass through the plates in the same direction as the plated winding. The "X" winding passes through in the same direction as the "Y" winding. No. 38 wire is used for all windings. A ~~green~~ green wire is passed through the memory plates at the same time as the 28t red winding. One end of this wire is soldered to the red ~~winding~~ winding, this equals 2 passes through the plates. The other end of the GRN. is soldered to the 24 ohm resistor. The other end of the resistor are shorted together.

Page Denied